### 13 JUL 2004 (12) INTERNATIONAL APPLICA SHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization International Bureau



# 

#### (43) International Publication Date 24 July 2003 (24.07.2003)

#### **PCT**

## (10) International Publication Number WO 2003/060891 A3

(51) International Patent Classification7: G02B 3/08, 5/18

G11B 7/135,

(21) International Application Number:

PCT/IB2002/005624

(22) International Filing Date:

18 December 2002 (18.12.2002)

(25) Filing Language:

**English** 

(26) Publication Language:

English

(30) Priority Data:

17 January 2002 (17.01.2002) EP

02075210.1 02077463.4

21 June 2002 (21.06.2002) EP

- (71) Applicant (for all designated States except US): KONIN-KLLIKE PHILIPS ELECTRONICS N.V. [NL/NL]: Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HENDRIKS, Bernardus, H., W. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


- (74) Agent: DEGUELLE, Wilhelmus, H., G.; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: OPTICAL SCANNING DEVICE

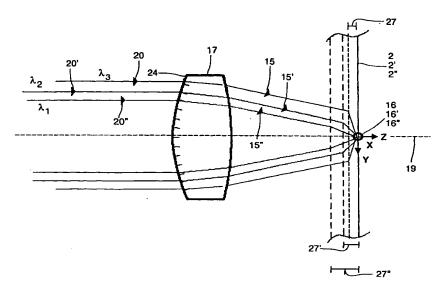

(57) Abstract: An optical scanning device (1) for scanning three information layer (2, 2', 2") with three respective radiation beams  $(4, 4^{\circ}, 4^{\circ})$  having three respective wavelengths  $(\lambda_1, \lambda_2, \lambda_3)$  and polarizations (p1, p2, p3). The three wavelengths differ from each other. At least one of the three polarizations differs from the others. The device comprises a diffractive part (24) including a pattern of pattern elements which have one stepped profile for forming three diffracted beams (15, 15', 15") from the three radiation beams, the part comprising birefringent material, sensitive to the three polarizations. The stepped profile is designed such that the heights (h<sub>i</sub>) of the steps of a pattern element introduce phase changes that equal at least two different multiples of  $2\pi$  for one ( $\lambda_1$ ) of the three wavelengths and equal at least two different phase changes modulo  $2\pi$  for one  $(\lambda_2)$  of the two other wavelengths.